



DeltaPore HP™ THRU-TUBING SCREEN



FEATURES:


- 316L stainless steel diffusion bonded media
- Alloy 20 available for CRA applications
- Rigid, durable media
- Fixed pore structure
- High permeability media
- Available in a wide range of micron ratings
- Custom screen lengths are available upon request

STANDARD APPLICATION:

- Heavy, viscous oils
- Unconsolidated sand formations
- High fines content

Specifications	
Blank Length	Pin - 4" min
Blank Length	Box - 4" min
Connection	NU 10RD T&C
Basepipe Metallurgy	L-80
Overall Assembly Length	10 ft
Outer Shroud	304/316
Metallurgy Filter Media	316L/A20

A	B	C	D	E			
Basepipe OD	Basepipe ID	Coupling OD	Outer Shroud OD	Sintered Cloth Opening Size	Tensile Strength	Collapse Strength	Burst Strength
in	in	in	in	microns	lbs	psi	psi
1.315	1.049	1.660	1.700	125	40,000	14550	1500
1.660	1.380	2.054	2.050	125	54,000	12300	1350
1.900	1.610	2.200	2.300	125	64,000	11280	1200
2.063	1.751	2.500	2.450	125	75,000	11180	1100

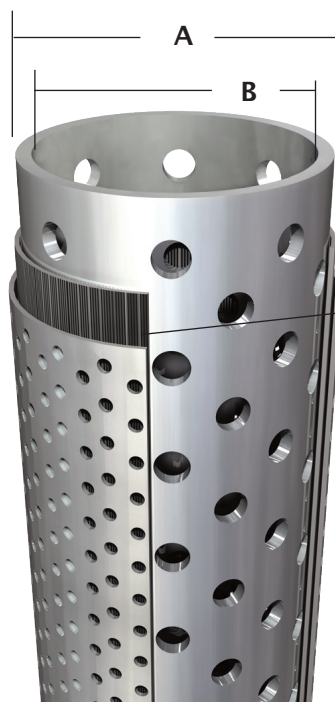

- A** - Basepipe Outer Diameter (O.D.)
- B** - Basepipe Inner Diameter (I.D.)
- C** - Coupling Outer Diameter (O.D.)
- D** - Outer Shroud Outer Diameter (O.D.)
- E** - Sintered Media Opening Size

www.deltascreens.com

P.O. Box 842397 Houston, Texas 77284
 main: 713-856-0300 fax: 713-856-0303